



□ Dimension unit=mm

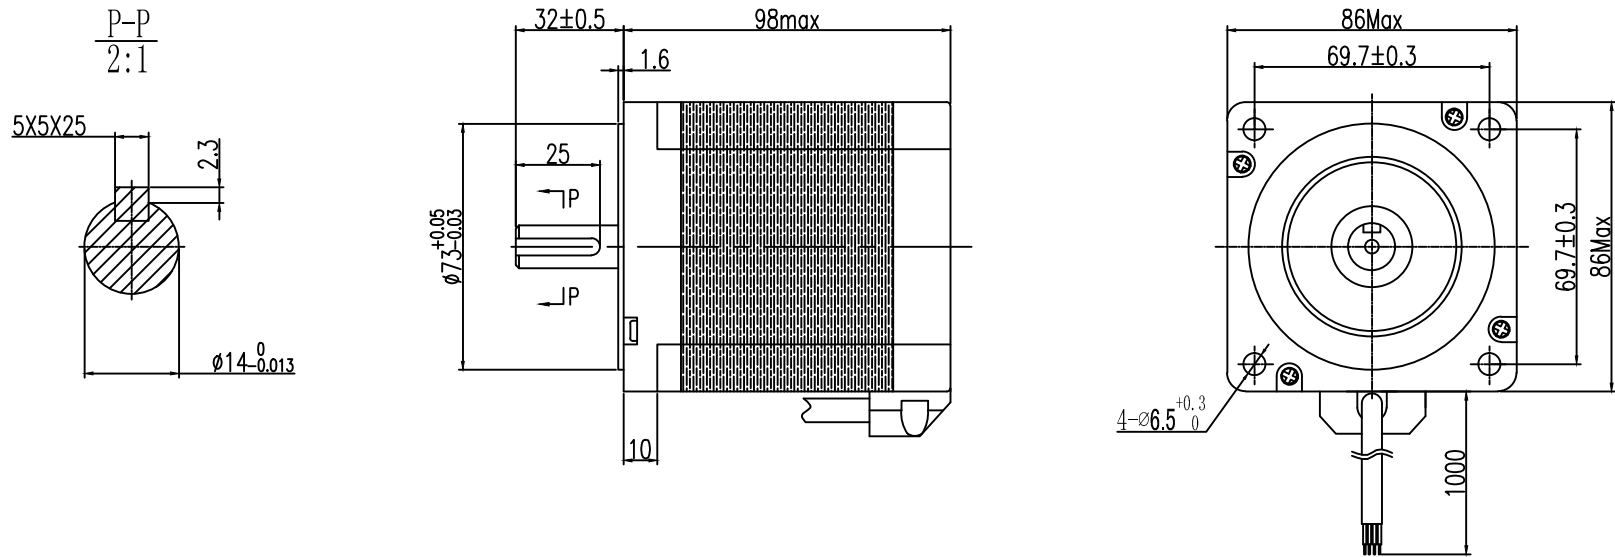

□ SPECIFICATIONS

步距角 /STEP ANGLE	1.8° ±5%
相数 /NO. OF PHASES	2
额定电压 /RATED VOLTAGE	2.0 V
额定电流 /RATED CURRENT	5.0 A
电阻 /RESISTANCE	0.4 Ω ±10%
电感 /INDUCTANCE	3.0 mH±20%
静转矩 /HOLDING TORQUE	650 N.cm
绝缘等级 /INSULATION CLASS	CLASS B(130° C)
引出线规格 /LEADSTYLE	RVV 0.75mm ² 电缆线

备注/NOTE:

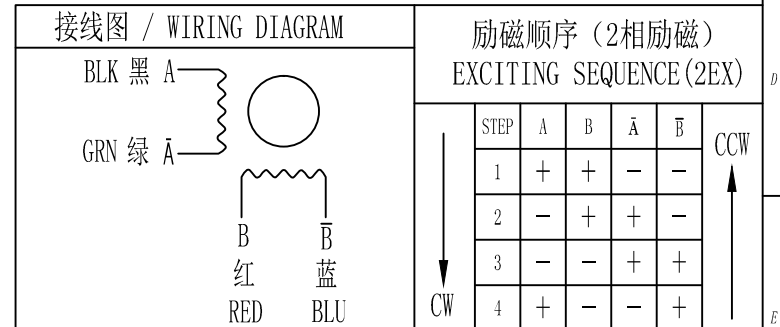

客户确认&接受 CONFIRMED&ACCEPTED BY CUSTOMER					型号/MODEL:	
盖章&签名 (COMPANY CHOP&SIGNATURE)					SL86S298A04PJ5-1432-01	
A NO. A	19/04/04	无	CXZ			
一般公差 TOLERANCE ±0.3/±0.3°	版本 REV	变更番号 ECO NO.	年月日 DATE	变更内容 REVISIONS	设计 BY	备注 NOTE
制图/DRAWN	陈锡泽	比例 SCALE	1:1	品名 TITLE		
设计/DESIGNED		单位 UNIT	mm		深圳市申力微特电机有限公司 SHENZHEN SHENLI WITT MOTOR CO., LTD	三视图 THIRD ANGLE PROJECTION
审核/CHECKED						
承认/APPROVED						
						页 SHEET
						1/1