


□ SPECIFICATIONS unit=mm

步距角 /STEP ANGLE	1.8° ±5%
相数 /NO. OF PHASES	2
额定电压 /RATED VOLTAGE	8.8 V
额定电流 /RATED CURRENT	2.0 A
电阻 /RESISTANCE	4.4 Ω ±10%
电感 /INDUCTANCE	9.8 mH ±20%
静转矩 /HOLDING TORQUE	280N. cm
绝缘等级 /INSULATION CLASS	CLASS B (130° C)
引出线规格 /LEADSTYLE	AWG22 UL3266

备注/NOTE:

接线图 / WIRING DIAGRAM

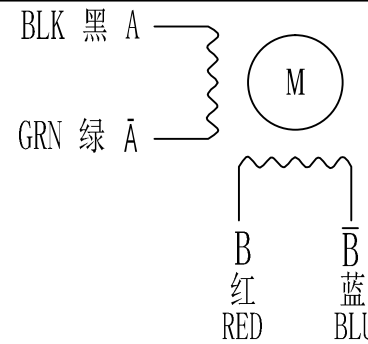

励磁顺序 (2相励磁)
EXCITING SEQUENCE (2EX)

	STEP	A	B	Ā	B̄	CCW
CW	1	+	+	-	-	
	2	-	+	+	-	
	3	-	-	+	+	
	4	+	-	-	+	

客户确认&接受 CONFIRMED&ACCEPTED BY CUSTOMER					型号/MODEL:
盖章&签名 (COMPANY CHOP&SIGNATURE)					SL57S2112A404B-0821
A NO. A	19/07/23	无	变更内容 REVISIONS	设计 BY	备注 NOTE
一般公差 TOLERANCE ±0.3/±0.3°	版本 REV	变更番号 ECO NO.	年月日 DATE	设计 BY	备注 NOTE
制图/DRAWN	陈锡泽	比例 SCALE	1:1	品名 TITLE	
设计/DESIGNED		单位 UNIT	mm		
审核/CHECKED					
承认/APPROVED					
					深圳市申力微特电机有限公司 SHENZHEN SHENLI WITT MOTOR CO., LTD
					页 SHEET
					1/1

三视图
THIRD ANGLE
PROJECTION

